



1008122020

## TFIE-2

### IP and SIP Intercom

- ✓ CCoIP/VoIP intercom for industrial environments
- ✓ Dual Ethernet connectivity for redundant networks
- ✓ ONVIF Compatible
- ✓ PoE powered
- ✓ Auxiliary DC power for redundancy
- ✓ DIP functionality for use with AlphaCom audio servers
- ✓ SIP/VoIP functionality for use with 3rd-party systems
- ✓ Dual relay outputs
- ✓ 6 configurable I/Os
- ✓ Dust- and water-protected to IP 66
- ✓ Accessories include Handheld PTT, Headset with ON/OFF and PTT and Handset with PTT
- ✓ Monitoring and self-diagnostics of critical functionality
- ✓ Visible status indicators on front panel



Industrial Intercom



UL Certified Intercom



IP66



Automatic Volume



HD Voice



Automatic Gain Control



Active Noise Cancelling



Open Duplex



Voice Activity Detection


## Description

The TFIE-2 Industrial intercom station is a rugged device, designed for harsh environments and meets industrial and offshore requirements. The plastic housing is designed to withstand most chemical and environmental hazards found on- or offshore. The TFIE-2 features 6 programmable, labelled buttons and optional key covers for alarm panel duties. The intercom station is fully digital and offers crystal clear audio with high output through a 10 W internal amplifier and 78 mm speaker, offering up to 100dB SPL.

Active Noise Reduction and Acoustic Echo Cancelling allows for hands-free two-way communication with superior audio quality. Intercom status indicators display the status of the system and are compatible with AlphaCom and Exigo systems as well as SIP functionality for use with 3rd party systems.

See also: [additional documentation on wiki.zenitel.com](https://wiki.zenitel.com)

## Technical Dimensions

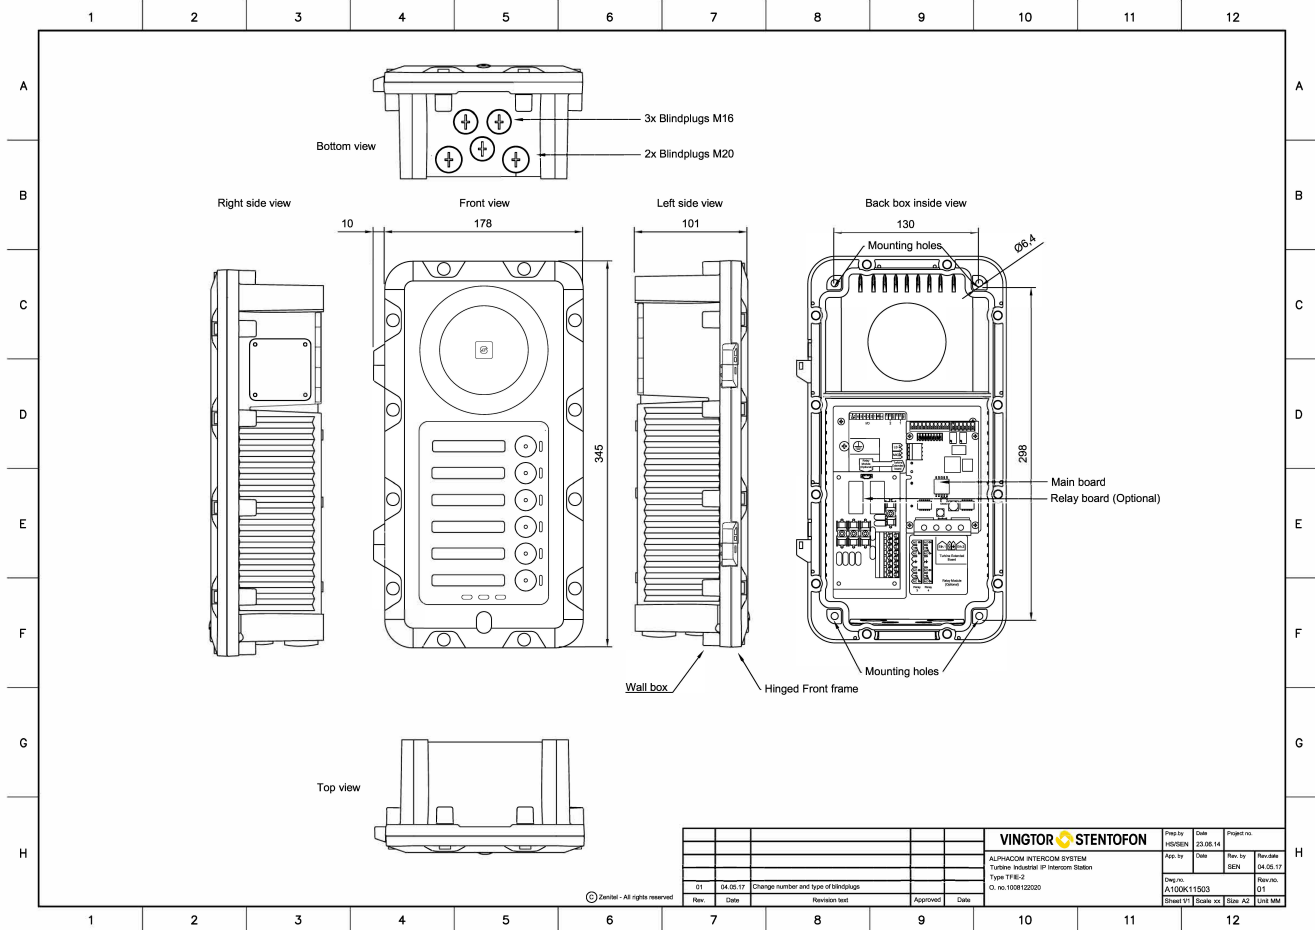

© Zenitel - All rights reserved

				<b>VINGTOR STENTOFON</b>		Proj. no.	
				ALPHACOM INTERCOM SYSTEM		Proj. no.	
				Type: INTERCOM IP Intercom Station		App. by	Rev. no.
				Type TFE-2		Rev. by	Rev. no.
				O. no. 1008120200		Rev. by	Rev. no.
01	04.05.17	Change number and type of blindplugs				01	01
Rev.	Date	Change number and type of blindplugs	Revision text	Approval	Date	Sheet 01	Total no. of sheets 02

# Specifications

## AUDIO

Noise cancelling - suppression of musical noise	YES
Noise cancelling - suppression of static noise	YES
Noise cancelling - suppression of rapidly changing noise	YES
Codecs	G.711, G.722, G.729
Frequency range, G.722 Codec	200 Hz – 7000 Hz
Audio technology	Modes: Full open duplex, switched open duplex
	Adaptive jitter filter
	Local tone generator
	Audio mixing - 3 channels
	Sound level detection (scream alarm)
	Automatic gain control (microphone)
	Automatic volume adjustment
Internal speaker amplifier	10 W class D
Automatic Volume Control (AVC)	Undistorted and clear audio
Acoustic Echo Cancellation (AEC)	Prevents audio feedback even at high volumes (95dB)
10W Speaker	Matches 10W amp for distortion- free broadcast level sound

## MECHANICAL

Dimensions	345 x 178 x 101 mm
Weight	1.9 kg
Mounting	On-wall box (included)
Color	Yellow + Black

## ENVIRONMENTAL

Operating temperature	-40°C to +70°C (-40°F to +158°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Operating humidity	10% to 95% RH (non- condensing)
Storage humidity	10% to 95% RH (non- condensing)
Air pressure	600 hPa to 1200 hPa
IP-rating	IP-66 tested according to IEC/EN 60529

ORDER NUMBER	DESCRIPTION
1008122010	TFIE-1 Full keypad with 1 programmable key
1008122020	TFIE-2 6 labelled programmable keys
<b>ACCESSORIES</b>	
1023594100	EGA-1 Button protection (10x) for TFIE/TFIX/EAPII/EAPFX
1023533312	EMMAI-2H Handheld Industrial Microphone, Compact, Waterproof for EAPII/TFIE
1008140100	TA-10 Connection board with relays for TFIE/EAPII
1008140225	TA-22b 10m cable and plugbox w/PTT for Industrial headset (for TFIE)
1008140230	TA-23 Industrial/Marine Handset w/PTT (for TFIE)
1008140250	TA-25 Set of replacement screws (M6) for TFIE/TFIX/EAPII/EAPFX
1008140260	TA-26 Set of cable glands for TFIE/EAPII
AK5850HS	A-Kabel TwinCom Headband Headset ATEX

#### ELECTRICAL

Ethernet connector	2 x RJ45
Power options	PoE or external power supply
PoE (Power over Ethernet)	IEEE 802.3af standard, Class 0 (0.44W to 12.95 W)
Auxiliary DC power	24 VDC nom (16 to 48 VDC)
Power consumption	2 W (idle) to 12,9 W (max)
Built-in switch	Managed, DHCP, Firewall
Compatibility	SIP, ICX-AlphaCom, IC-EDGE, G.711, G.722, G.729, HD Voice
Handheld Microphone	Microphone (bal), PTT
Handset	Microphone (bal), Speaker (bal), + PTT
Headset	Microphone (bal), Speaker (bal) + PTT
Digital inputs/outputs	6 (configurable input/output/LED-driving)
Relay outputs	2 (250VAC/200VDC, 2A, 60W, 10^8 operations)
Audio	Line-in, Line-out
Aux power	1 (tool-free terminals)

## NETWORKING AND PROTOCOLS

Ethernet	10BASE-TX, 100BASE-TX , Auto negotiation, Auto MDIX
Protocols	IPv4 (with DiffServ), SIP, TCP, UDP, HTTPS, TFTP, RTP, DHCP, SNMP, ONVIF, CoIP®, NTP
LAN protocols	Power over Ethernet (IEEE 802.3 a-f) Network Access Control (IEEE 802.1x)
Management and operation	HTTP/HTTPS (Web configuration) DHCP and static IP + IC-EDGE Remote automatic software upgrade Centralized monitoring
Advanced supervision functions	E.g. network test, tone test, status reports
SIP support	RFC 3261 (SIP base standard) RFC 3515 (SIP refer) RFC 2976 (SIP info)
DTMF support	RFC 2833, 2976 (SIP info)

## CERTIFICATIONS

Immunity	EN 60945, EN 50130-4, EN 61000-6-1, EN 61000-6-2, FCC-47 part 15B
Emission	EN 60945, EN 50130-4, EN 61000-6-3, EN 61000-6-4, FCC-47 part 15B
Certificates	UL 60950-1, cUL 60950-1, CB to IEC 60950-1

## OTHER SPECIFICATIONS

Warranty	2 Years standard warranty, extendible up to total of 5 years (additional fee)
----------	---

## Accessories



EMMAI-2H

Handheld Compact Industrial Microphone For Exigo/Turbine



TA-23

Industrial Handset for Turbine with PTT



AK5850HS

Ex-approved Headset



AK5850BS Ex TwinCom Helmet Headset w/ear plug connector

Ex-approved Headset with helmet mounting and connector for ear plug



AK5850BHS Ex TwinCom Headband Headset w/ear plug connector

Ex-approved Headset with headband




TA-22B

Industrial Plugbox & Cable for Headset with PTT



TA-10

Relay Module



EGA-1

Button Protection Covers